SG 1025

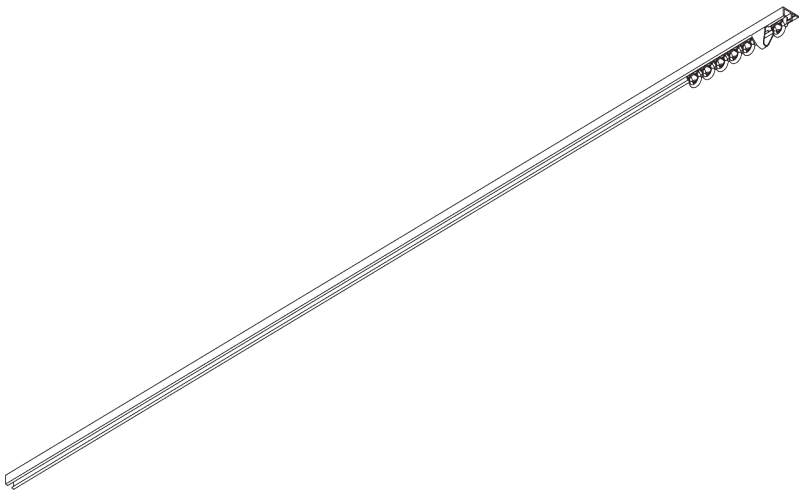

PRODUCT INFORMATION

- ***Operation:*** *hand*
- ***Range:*** *S*
- ***Fitting:*** *ceiling*
- ***Colours:*** *white RAL 9016; special colours or anodised aluminum possible*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *Pre-drilled profile*
- *Bendable*

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information



SG 1025p

Profile

Radius:
6 cm, 10 cm

B. HOW TO MEASURE

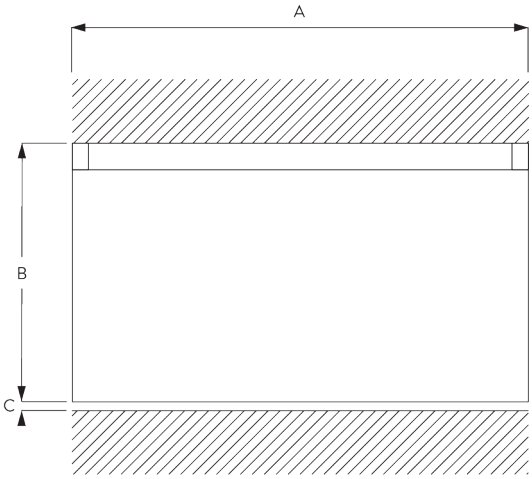

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

Silent Gliss SG 1025 Hand Operated Curtain Track System. *Comprises aluminium profile SG 1025 supplied made to measure powder coated white/ silver anodised with gliders SG 3533 at 14/m and 2 end stops SG 3016 per length. Top fixed to timber only with screw SG 6835 at max. 300 mm centres.*

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

Direct into wood

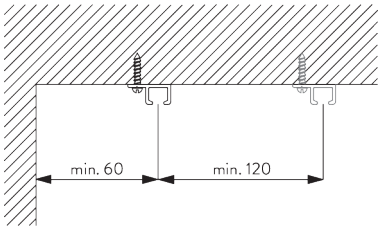

PARTS

A. STANDARD PARTS



SG 1025p
Profile



SG 3016
End stop

SG 3533
Glider



SG 10896
Pan head screw 2.9x13

B. OPTIONAL PARTS

SG 3020
Hook

SG 3032
Spring stop



SG 3068
Frizzing tape

SG 3070
End stop



SG 3071
End stop



SG 3511
Glider

SG 3534
Glider 3533 on strip



SG 3548
Glider



SG 3562
Heading tape

SG 3570
Glider

SG 3571
Hook

SG 3582
Hook

SG 3599
Hook

SG 10430
Draw rod 50 cm



SG 10431
Draw rod 75 cm



SG 10432
Draw rod 100 cm



SG 10433
Draw rod 125 cm



SG 10434
Draw rod 150 cm

SG 10799



SG 11335
End stop