SG 4955

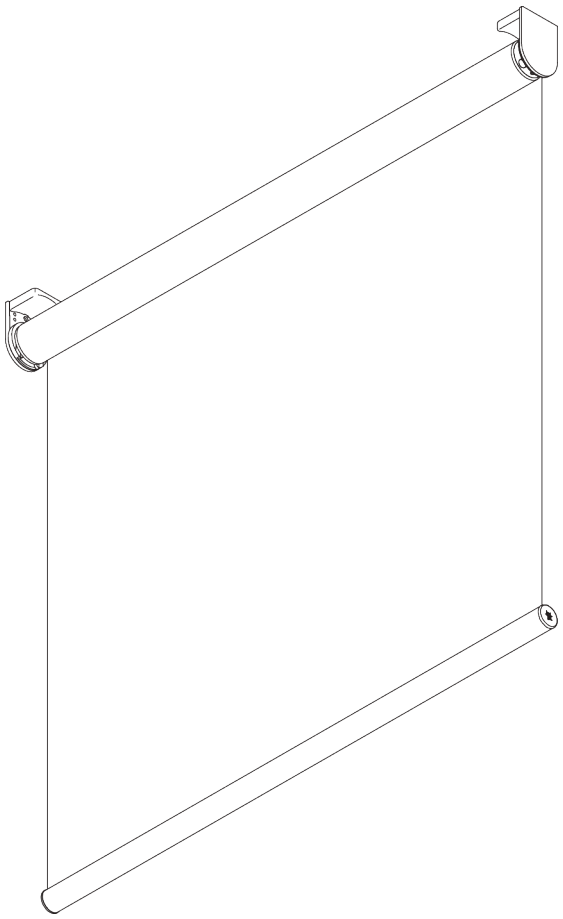

PRODUCT INFORMATION

- ***Operation:*** *motorised*
- ***Range:*** *S - M*
- ***Fitting:*** *ceiling, wall, recess*
- ***Colours:*** *white RAL 9016, grey RAL 7035*, black RAL 9005* (*motorhead in white only); special colours possible*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *Quiet motor, soft stop*
- *Various control options*
- *Two systems side-by-side*
- *Click-in brackets*
- *Fascia, box, installation profile*

10/2026/V1

SilentGliss

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

2.4 m



65 cm



3 m

7.2 m²

4 kg



Recommended width / height ratio max. 1:3

Maximum system drop

Wall fitting (system drop on window side)

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	300	300	300	300	300	300	300	300	300	290	270	250	230	220

Ceiling fitting / wall fitting (system drop on room side)

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	300	300	300	300	300	300	300	300	300	300	300	300	300	280

B. PROFILE

Profile information



SG 10532

Tube ø 43 mm



SG 10760

Bottom bar



SG 10770

Bottom bar



SG 4903

Bottom bar



SG 11442

Bottom bar



SG 10534

Installation profile



SG 11430

Installation profile fascia 73 mm



SG 11530

Installation profile fascia 110 mm



SG 11431

Fascia round 73 mm



SG 11531

Fascia round 110 mm



SG 11432

Fascia square 73 mm



SG 11532

Fascia square 110 mm



SG 11433

Box case 73 mm



SG 11533

Box case 110 mm



SG 11434

Box cover



SG 11534

Box cover 110 mm

C. HOW TO MEASURE

incl. bracket covers

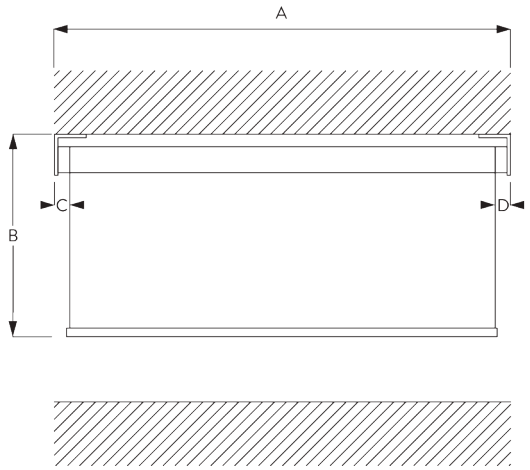

A: System width
B: System height
C: Light gap: 10 mm
D: Light gap operation side: 26 mm

Note:
All measurements include 2 mm for bracket cover per side!

Fascia / Box

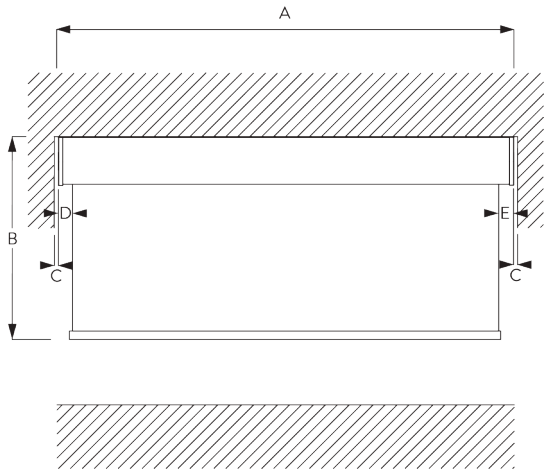

A: System width
B: System height
*C: Gap: min. 10 mm (when cover is used)**
D: Light gap: 12 mm
E: Light gap operation side: 28 mm

Note:
**Possible to make Fascia wider than system to reduce gap between wall and system.*

D. SPECIFICATION TEXT

Silent Gliss SG 4955 Battery Operated Roller Blind System. *Roller blind system for light to medium size blind applications up to 2.4m wide/3m drop/ 4kg. Supplied made to measure and assembled comprising anodised aluminium barrel SG 10532. Fix to wall/ceiling/inside recess with brackets SG 10542/SG10543 and bracket covers SG 10574/SG 10575. Bottom bar [SG 10760 round / SG 10770 square / SG 4903 oval]. Visible metal hardware powder coated in [white / black / grey]. Integral rechargeable battery motor SG 11926 with USB C charging port positioned [left / right] side. Operation by Silent Gliss Control N radio handsets and switches and/or Move4.0 Server/App. Fabric to be chosen from The Collection by Silent Gliss, Price Group [1R / 2R / 3R].*

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



Brackets (wall / ceiling)



Fascia / box & installation profile SG 10534 (wall / ceiling)

B. CEILING FITTING



Brackets



Installation profile SG 10534 and clamps SG 3033 or SG 3044



Installation profile SG 10534 and click bracket SG 10539

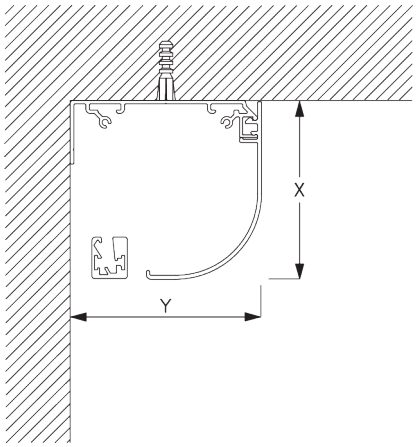

Fascia round

X = Fascia S 73 mm / Fascia L 110 mm
Y = Fascia S 78 mm / Fascia L 110 mm

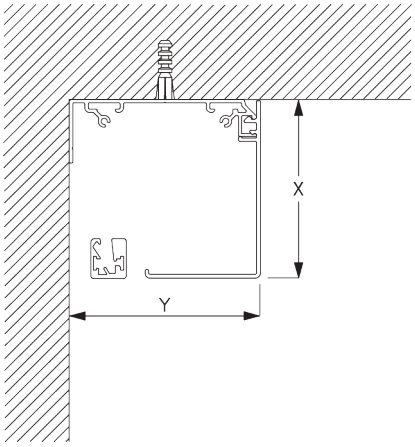

Fascia square
X = Fascia S 73 mm / Fascia L 110 mm
Y = Fascia S 78 mm / Fascia L 110 mm

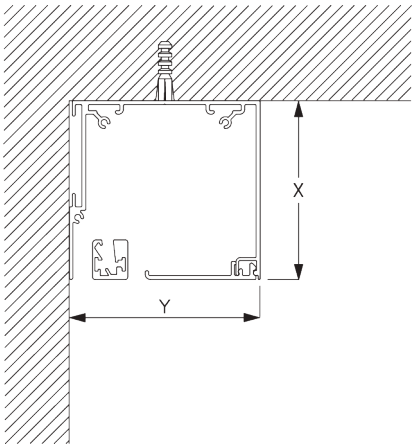

Box
X = Box S 73 mm / Box L 110 mm
Y = Box S 78 mm / Box L 110 mm



SG 3033
Clamp



SG 3044
Clamp



SG 10534
Installation profile



SG 10539
Bracket



SG 10542
Bracket



SG 10543
Bracket



SG 10574
Bracket cover



SG 10575
Bracket cover



SG 10690

Spacer

C. WALL FITTING



Brackets



Installation profile SG 10534 and clamps SG 3033 or SG 3044



Installation profile SG 10534 and click bracket SG 10539

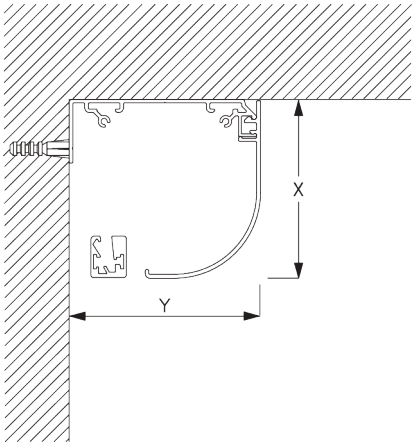

Fascia round
X = Fascia S 73 mm / Fascia L 110 mm
Y = Fascia S 78 mm / Fascia L 110 mm

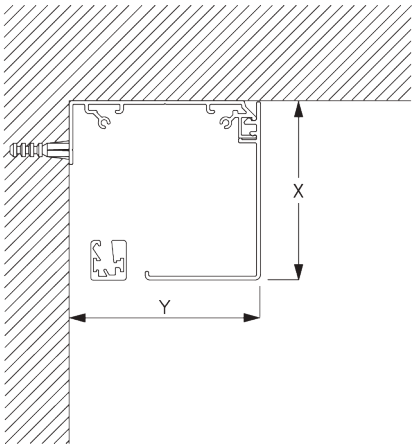

Fascia square
X = Fascia S 73 mm / Fascia L 110 mm
Y = Fascia S 78 mm / Fascia L 110 mm

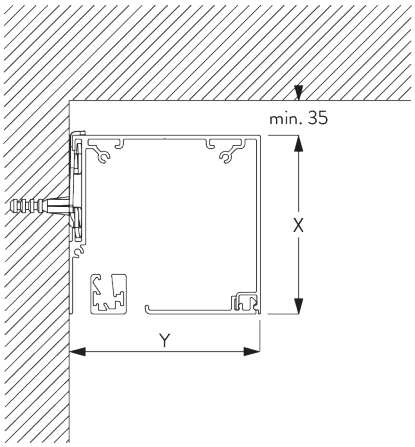

Box S and clamp SG 3044 / Box L and clamp SG 11180
X = Box S 73 mm / Box L 110 mm
Y = Box S 78 mm / Box L 110 mm



SG 3033
Clamp



SG 3044
Clamp



SG 11180
Clamp



SG 10534
Installation profile



SG 10539
Bracket



SG 10542
Bracket



SG 10543
Bracket



SG 10574
Bracket cover



SG 10575
Bracket cover



SG 10690
Spacer

D. RECESS FITTING

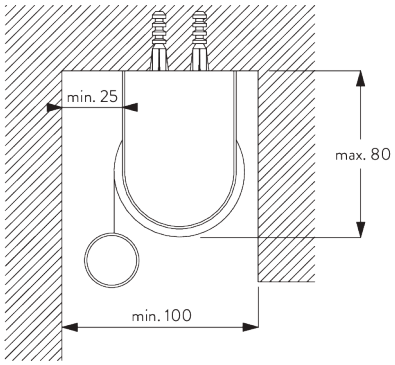

Brackets

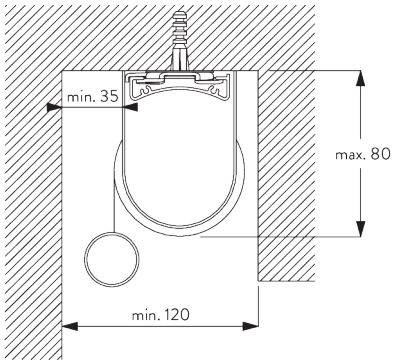

Installation profile SG 10534 and clamps SG 3033 or SG 3044

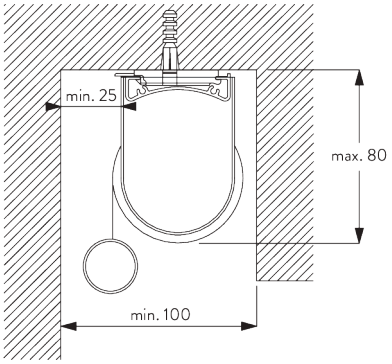

Installation profile SG 10534 and click bracket SG 10539

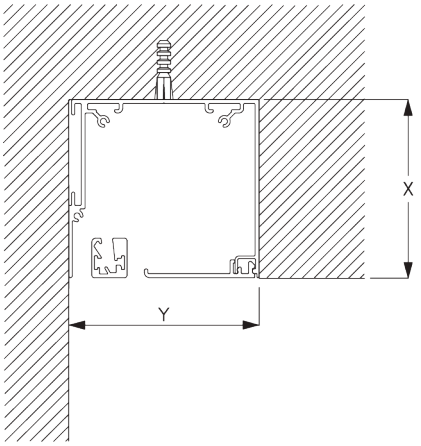

Box
X = Box S 73 mm / Box L 110 mm
Y = Box S min. 79 mm / Box L min. 111 mm



SG 3033
Clamp



SG 3044
Clamp



SG 10534
Installation profile



SG 10539
Bracket



SG 10542
Bracket



SG 10543
Bracket



SG 10574
Bracket cover



SG 10575
Bracket cover



SG 10690
Spacer

SYSTEM OPTIONS

A. FABRIC ROLL-OFF

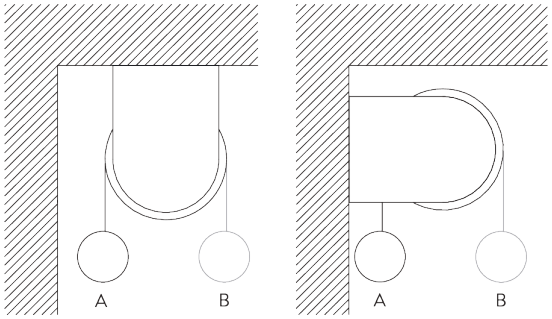

A: Fabric roll-off window side (standard)
B: Fabric roll-off room side (option)

B. INSTALLATION PROFILE



C. TWO SINGLE SYSTEMS SIDE-BY-SIDE



Additional parts:
– 1x SG 10632 Connection bracket cover

D. FASCIA / BOX

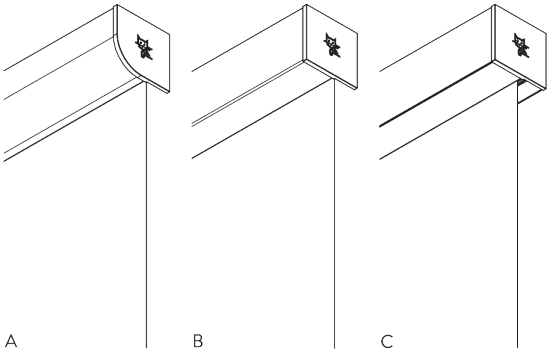

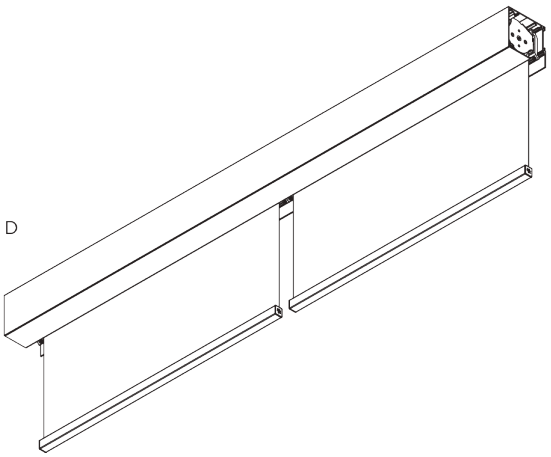

A: Fascia round
B: Fascia square
C: Box

Size:
- *S: 78 x 73 mm*
- *L: 110 x 110 mm*

Note:
- *Only applicable with bottom bar SG 11442*
- *Two systems with one Fascia possible upon request*

MOTORS & CONTROLS

A. MOTOR FEATURES

Motor	SG 11926
Motor Features	
Soft start / stop	●
Built-in receiver	●
Electronic end-stop	●
Electronic revolution counter (unlimited revolution)	●
Motor head white / black / grey	● / - / -
IP class	IP 30
Control Features	
SG Control N (built-in receiver)	●

B. MOTOR SPECIFICATIONS

Motor	Min. system width	Charging	Speed	Frequency receiver
SG 11926	65 cm	USB-C	28 rpm	433 MHz

Battery charging

A: Plug-in USB-C cable
B: Battery fully charged when light is green

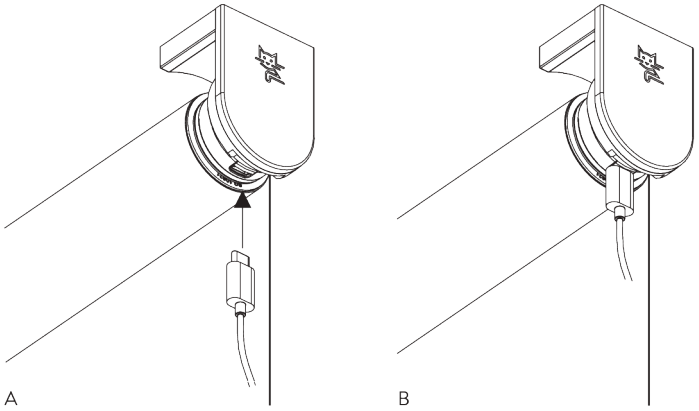

C. OPERATING METHODS

See catalogue "controls" for details.

SG Control N

Various radio hand-held and wall transmitters available.

Silent Gliss Move App.

PARTS

A. STANDARD PARTS

SG 4226

Double tape 30 mm

SG 10532

Tube ø 43 mm



SG 10542

Bracket



SG 10543

Bracket

SG 10574

Bracket cover



SG 10575

Bracket cover

SG 10621

Tube adapter

SG 10668

PVC strip 10 mm

SG 10747

Motor plate S

SG 10760

Bottom bar

SG 10761

End cover



SG 11258

Tube adapter



SG 11322

PT Screw Countersunk KA35x10 WN 1413



SG 11356

Motor drive 40/50-Series



SG 11926

Motor Battery S 2/28

B. OPTIONAL PARTS

SG 3033

Clamp

SG 3044

Clamp

SG 4903

Bottom bar



SG 10498

Countersunk screw 2.9x9.5

SG 10534

Installation profile



SG 10539

Bracket



SG 10632

Connection bracket cover



SG 10690

Spacer



SG 10770

Bottom bar

SG 10771

End cover

SG 11178

End cover

SG 11180

Clamp



SG 11430

Installation profile fascia 73 mm

SG 11431

Fascia round 73 mm



SG 11432

Fascia square 73 mm



SG 11433

Box case 73 mm

SG 11434

Box cover

SG 11437

Bracket cover round left 73 mm

SG 11438

Bracket cover round right 73 mm

SG 11439

Bracket cover square left 73 mm

SG 11440

Bracket cover square right 73 mm

SG 11442

Bottom bar



SG 11443

End cover



SG 11446

Bracket left 73 mm



SG 11447

Bracket right 73 mm



SG 11448

Bracket left 73 mm



SG 11449

Bracket right 73 mm



SG 11530

Installation profile fascia 110 mm

SG 11531

Fascia round 110 mm

SG 11532

Fascia square 110 mm



SG 11533

Box case 110 mm

SG 11534

Box cover 110 mm

SG 11537

Bracket cover round left 110 mm

SG 11538

Bracket cover round right 110 mm

SG 11539

Bracket cover square left 110 mm

SG 11540

Bracket cover square right 110 mm



SG 11546

Bracket left 110 mm

SG 11547

Bracket right 110 mm



SG 11548

Bracket left 110 mm

SG 11549

Bracket right 110 mm



SG 11900

Move Server



SG 11931

Radio hand held 1 channel



SG 11932

Radio hand held 6 channel

SG 11936

Radio wall transmitter 1 channel

SG 11937

Radio wall transmitter 6 channel



SG 11951

Charger USB-C