

Electric Curtain Track Systems





Application Chart

Dimensions		Applications					Profile			Features / Options					Fitting Options		Fitting Surfaces		System					
max.	kg max.	Single Stack	Pair Stack	Multiple Stack	Asymmetric	Heavy Duty	Profile Number	Dimensions in mm	Gliding Channel	Special Recess Profile available	Min. Bending Radius (mm)	Rollers and Gliders applicable	Various Motor Options	Manual override	Touch & Go	Wave applicable	Silent Gliss 9940 / Move App	Ceiling Fix		Recess Fix	Wall Fix	Wood	Concrete	Suspended Ceiling
5 m	25 kg	●	●				10925		6.2	300		●	●	●	●		●	●	●	●	●	●	●	5100
25 m	65 kg	●	●				10850		6.5	250	●	●	●	●	●	●	●	●	●	●	●	●	●	5600
25 m	74 kg	●	●	●	●	●	5301		5.4	500	●					●	●	●	●	●	●	●	5300	
60 m	280 kg	●	●	●		●	5810		10	500	Roller only					●	●			●	●		5800	



Electric track load charts

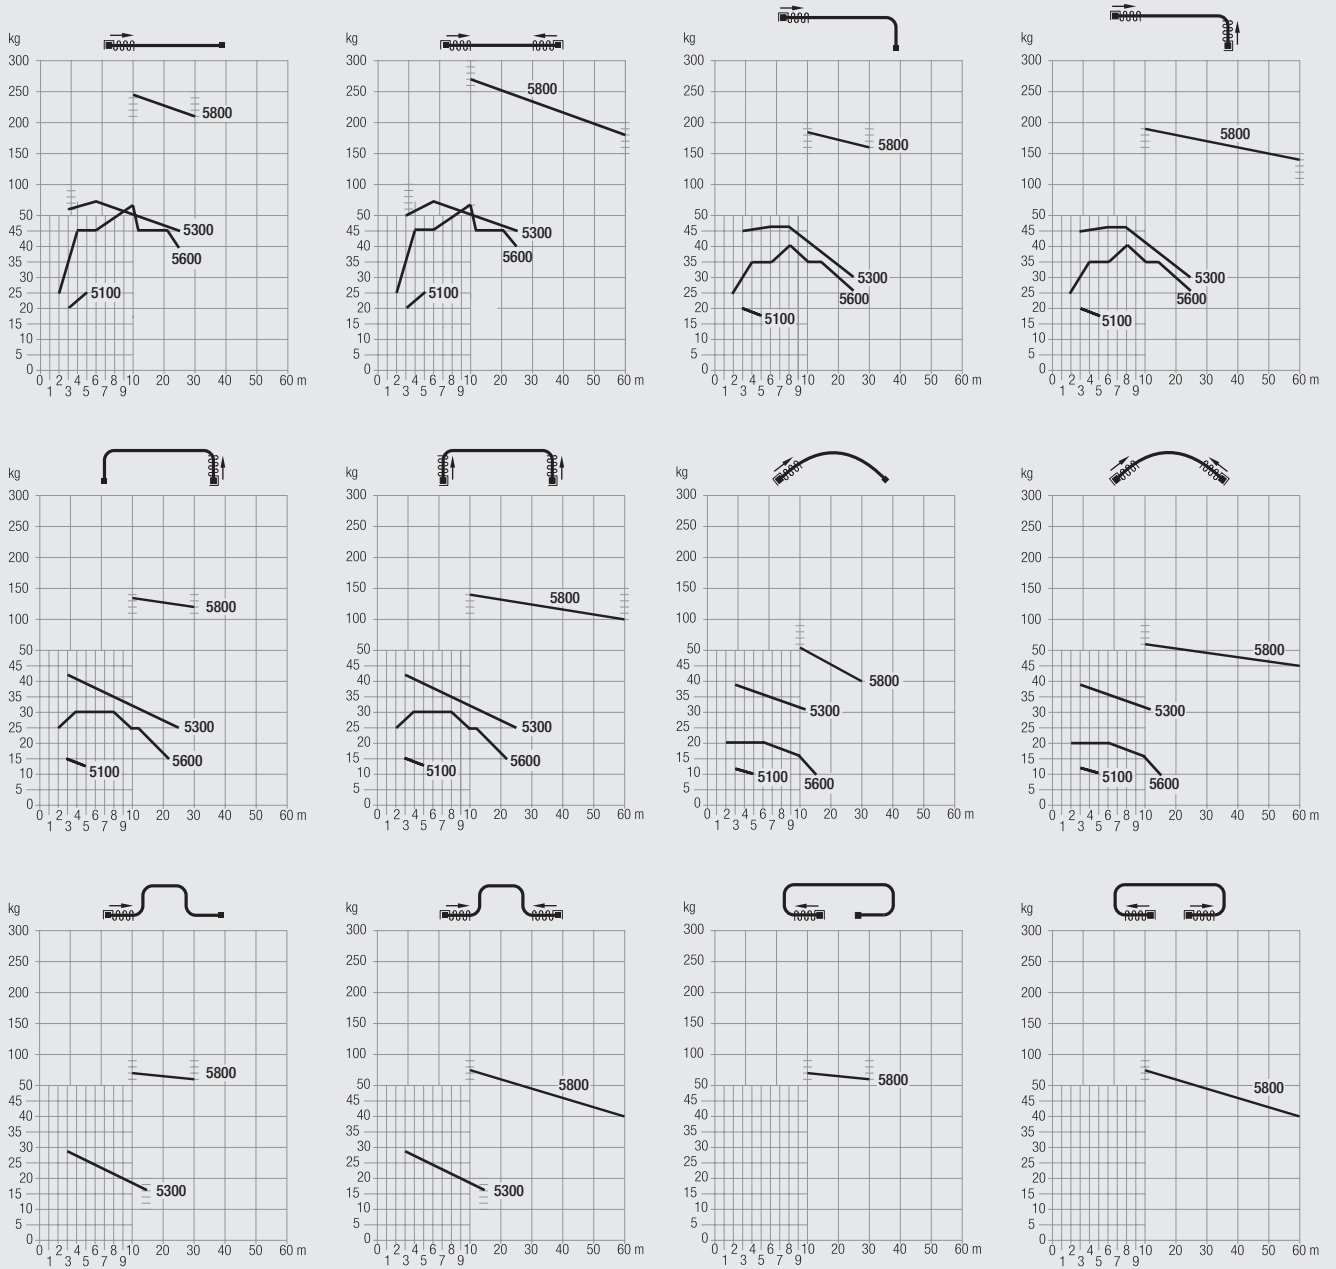

The curtain heading must be completely below the track or the guarantee is invalid.

www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com